



ORIGINAL ENGINEERED LUBRICANTS



# ACE-TORQUE NH-0304

## COMPRESSOR OILS


PREMIUM AFTER MARKET FLUID  
Fully Synthetic & Long Drain

# ACE-TORQUE NH-0304

## Description

This high quality fully synthetic compressor oil is based on PAO base oils, with a natural high resistance against oxidation. Under addition of additives this oil meets the following properties:

- low oil consumption due to low volatility
- low carbon-forming tendencies
- very good oxidation stability
- very good protection against corrosion
- very good anti-wear properties
- excellent thermal stability

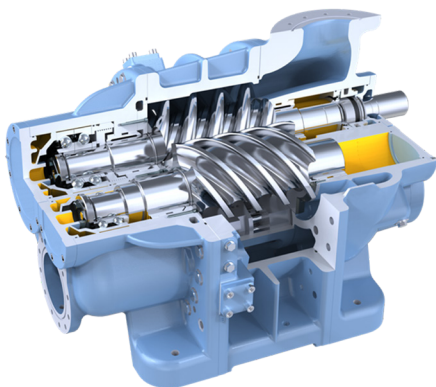

THE MOST FLEXIBLE PACK SIZES

5Lx4 ■ 20L ■ 205L

## Application

This compressor oil is recommended for oil-flooded rotary sliding-vane and screw-type compressors, even in the most severe conditions. This oil has low carbon-forming tendencies and minimises the formation of deposits in the discharge system at the temperature range where these compressors operate. Due to the high quality of this compressor oil, mostly the service interval can be extended.

## Performance Level

### ISO 6743-3A DAJ

Typicals Density at 15 °C, kg/l :	0,834
Viscosity 40 °C, mm <sup>2</sup> /s :	44,10
Viscosity 100 °C, mm <sup>2</sup> /s :	7,79
Viscosity Index :	147
Flash Point COC, °C :	266
Pour Point, °C :	- 42